

8GTE35

SPECIFICATIONS

Nominal Voltage (V)	6V
Capacity at C/100	211 Ah
Capacity at C/20	196 Ah
Capacity at C/5	167 Ah
Weight	69 lbs. (31.3 kg)
Plate Alloy	Lead Calcium
Posts	Forged Bushings
Container/Cover	Polypropylene
Operating Temperature Range	-76°F (-60°C) - 140°F (60°C)
Charge Voltage @ 77°F (25°C)	
Charge / Absorption / Equalize	2.30 - 2.43 VPC
Float / Standby	2.23 - 2.26 VPC
Vent	Self-sealing
Electrolyte	Sulfuric acid thixotropic gel
Terminal	S (SAE)



Rated UN2794 - Wet, Filled with Acid

Made in the U.S.A. by East Penn Manufacturing Co., Inc.

Distributed by:

Valve-Regulated, Gelled-Electrolyte Battery




DIMENSIONS

Inches (mm)

Length	9.64 (245 mm)
Width	7.51 (191 mm)
Height	10.65 (270 mm)

Gel Cycle Life vs Depth of Discharge at +25°C (77°F)
Based on BCI 2-hour Capacity

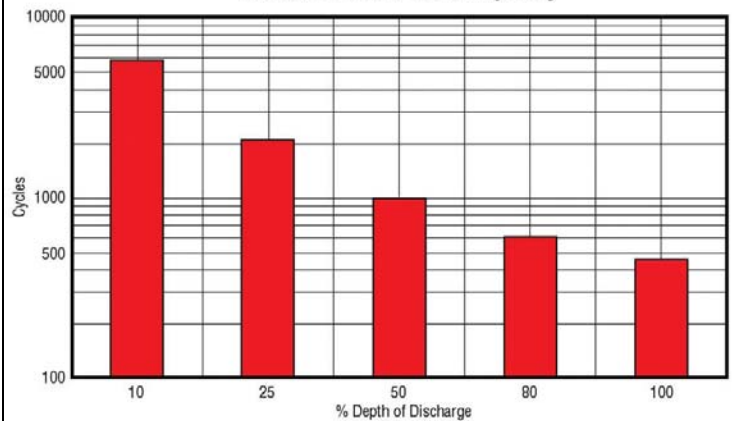

MK Battery

1631 South Sinclair Street • Anaheim, California 92806

Toll Free: 800-372-9253 • Fax: 714-937-0818 • E-mail: sales@mkbattery.com

