



ES12-12

SPECIFICATIONS

Nominal Voltage (V) 12V

Nominal Capacity

20 hour rate (0.6A to 10.50V)	12Ah
10 hour rate (1.14A to 10.50V)	11.4Ah
5 hour rate (2.04A to 10.20V)	10.2Ah
1C (12A to 9.60V)	5.4Ah
3C (36A to 9.60V)	4.20Ah

Weight Approx. 8.98Lbs. (4.07kg)

Internal Resistance (at 1KHz) 13 mΩ

Maximum Discharge Current for 30 seconds : 240A

Maximum Discharge Current for 5 seconds : 480A

Operating Temperature Range

Charge	0°C (32°F) to 40°C (104°F)
Discharge	-15°C (5°F) to 50°C (122°F)
Storage	-15°C (5°F) to 40°C (104°F)

Charge Retention (shelf life) at 20°C (68°F)

1 month	92%
3 months	90%
6 months	80%

Charging Methods at 20°C (68°F)

Cycle Use : Charging Voltage 14.4 to 15.0V
Maximum Charging Current : 3.6A

Standby Use : Float Charging Voltage 13.50 to 13.80V

Life expectancy :

Cycle Use :	100% depth of discharge 200 cycles
	80% depth of discharge 225 cycles
	50% depth of discharge 500 cycles

Standby Use : 3-5 years

Case Material : ABS
(Option : 94-HB & 94V-0 Flame Retardant Case Material)


Terminal : F2

Maintenance-Free Rechargeable Sealed Lead-Acid Battery






DIMENSIONS

mm(inch)



F2
(FASTON TAB NO. 250)

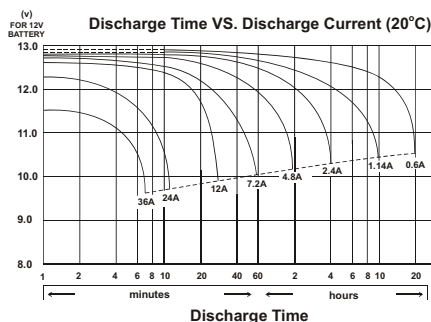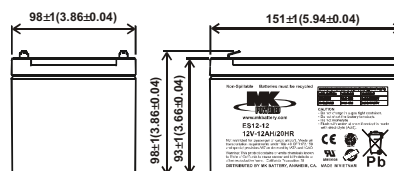

MK Battery

1631 South Sinclair Street • Anaheim, California 92806

Toll Free: 800-372-9253 • Fax: 714-937-0818 • E-mail: sales@mkbattery.com

